



ETL Systems
New technologies
in RF distribution

Model Number:
VTX-100-XXXX

64 x 64 Vortex Extended L-band Distributive Switch Matrix / Router

New compact
design & enhanced RF performance

Typical applications:

- Live news & sport traffic for larger teleports.
- High capacity signal monitoring of satellite traffic.
- RF content acquisition for TVRO & IPTV headends.
- Remote controlled unmanned satcom sites.

ETL's Vortex Extended L-band matrix has been redesigned to now offer an extremely compact form factor, and enhanced RF performance. Vortex uses leading edge technology switching cards, giving excellent RF performance in a compact chassis.



850 - 2450 MHz
operating frequency range



Improved RF Performance including noise figure, return loss, OIP3 & isolation



Compact up to 64 inputs & 64 outputs housed in a 5U high chassis



Local control & monitoring via front panel capacitive touchscreen



Expansion in blocks of 16 or with additional matrix modules for larger systems



Resilience from dual redundant power supplies & CPU modules



Minimal impact from failure with hot-swap RF cards, power supplies, CPU & fans




Secure Communications with SNMPv3, HTTPS



Self diagnostics with continuous monitoring of amplifiers, CPU's & PSU's



Remote control & monitoring via RJ45 Ethernet port with SNMP & web browser interface

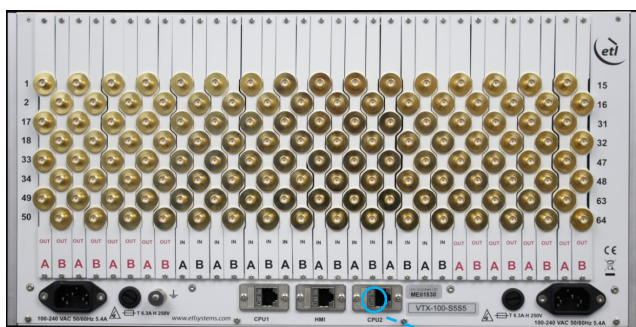



Technical specifications and operating parameters

General Parameters		
Capacity	64 inputs x 64 outputs	
Routing	Distributive, non-blocking	Any input can be connected to any number of outputs
Frequency Range	850-2450 MHz (Extended L-band)	
Switching Time	<50ms	From receipt of a command to implementation of path change
Input RF Power	+20dBm	Absolute maximum

RF Parameters					
RF Connectors & Impedances		50Ω SMA	50Ω BNC	75 Ω BNC	75Ω F-type
Gain (Typical, mean across band)		0±2 dB	0±2 dB	0±2 dB	0±2 dB
Gain Flatness	Full band	±1.75 dB	±1.75 dB	±2.0 dB	±2.0 dB
	850-2150MHz	±1.25 dB	±1.25 dB	±1.5 dB	±1.5 dB
	Any 36MHz	±0.3 dB	±0.3 dB	±0.5 dB	±0.5 dB
Input Return Loss	Typical	20 dB	20 dB	16 dB	16 dB
	Minimum	14 dB	12 dB	10 dB	10 dB
Output Return Loss	Typical	20 dB	20 dB	16 dB	16 dB
	Minimum	12 dB	12 dB	10 dB	10 dB
Isolation (Minimum between any two ports)	I/P - I/P	75 dB			
	O/P - O/P	75 dB			
	I/P - O/P	60 dB			
Noise Figure (Typical, with one input routed to one output)	Typical	12 dB			
	Maximum	14 dB			
1 dB GCP 1 dB Gain Compression point, output power		Typ. 0 dBm			
OIP3 3rd order intercept point.	Full band	Typ. 14 dBm, min 9 dBm			
	850-2150 MHz	Typ. 16 dBm, min 12 dBm			
OIP2 2nd order intercept point.	Typical	26 dBm			
	Minimum	24 dBm			
Group Delay		≤ 1 ns Variation across the operational bandwidth.			

Environmental		
Operating Temperature	0 to 45°C	
Gain Stability versus Temperature	0.05dB/°C	
Location	Indoor use only	
Storage Temperature	-20°C to +75°C	
Humidity	20 to 90% non-condensing	
Altitude	operational	10,000 ft AMSL (above mean sea level)
	storage	30,000 ft AMSL (above mean sea level)

Power		
PSU Power	85-264Vac 50-60Hz	Fused 2A
AC Consumption	350W	Max. consumption at steady state

Reliability		
PSU	Dual redundant & alarmed Diode OR. Hot-swap	
CPU	Dual redundant Hot-swap	
Input Cards	Hot-swap	
Output Cards	Hot-swap	
Matrix Cards	Hot-swap	
MTTR	20 minutes 15 minutes to retrieve spare part & 5 minutes to replace	
MTBF (Hours)	Chassis	>250,000 chassis excludes HMI & RF cards
	Switch Card	>250,000
	Divider Card	>300,000
	Matrix Card	>100,000

System Control & Monitoring	
Local Control & Monitoring	Via Front Panel HMI capacitive touchscreen
Remote Control & Monitoring	Ethernet via RJ45, 10BaseT/100BaseTx ETL TCP/IP protocol SNMP Built-in Web Server
Alarms	Ethernet (RJ45)

Physical	
Dimensions	5U high x 550 mm deep x 19" wide
Weight	40 kg
Colour	RAL9003 - White (semi-matte)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.



Esatcom Inc
www.esatcom.com
Tel: 718.276.0800
Email: sales@esatcom.com

