



**ETL Systems**  
New technologies  
in RF distribution

Model Number:  
VTXC-101-XXXX


# 64 x 64 Vortex L-band Combining Switch Matrix / Router

Low noise &  
enhanced RF performance

### Typical applications:

- Live news & sport traffic for larger teleports.
- High capacity signal monitoring of satellite traffic.
- RF content acquisition for TVRO & IPTV headends.
- Remote controlled unmanned satcom sites.

ETL's Vortex Extended L-band matrix has been redesigned to now offer an extremely compact form factor, and enhanced RF performance. Vortex uses leading edge technology switching cards, giving excellent RF performance in a compact chassis. The VTXC-101 benefits from a low noise figure.

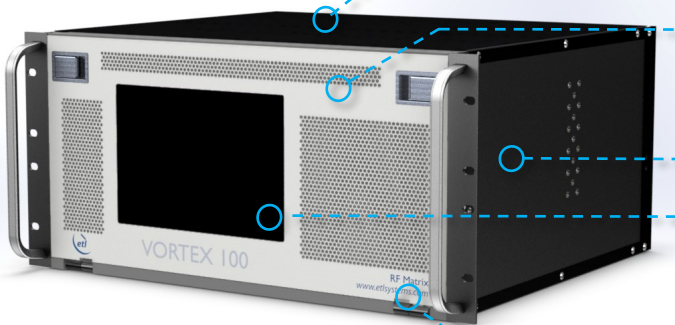

**850 - 2150 MHz**  
operating frequency range



**Improved RF Performance** including especially low noise figure.



**Compact** up to 64 inputs & 64 outputs housed in a 5U high chassis



**Local control & monitoring** via front panel capacitive touchscreen



**Expansion** in blocks of 16 or with additional matrix modules for larger systems



**Resilience** from dual redundant power supplies & CPU modules



**Minimal impact from failure** with hot-swap RF cards, power supplies, CPU & fans





**Secure Communications** with SNMPv3, HTTPS



**Remote control & monitoring** via RJ45 Ethernet port with SNMPv3 & web browser interface



**Self diagnostics** with continuous monitoring of amplifiers, CPU's & PSU's

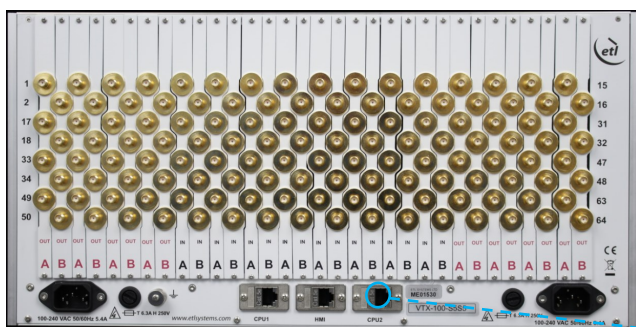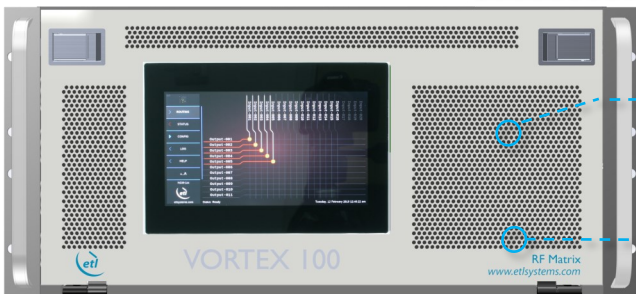

Note: Rear image shows distributive model





**Technical specifications and operating parameters**

General Parameters		
Capacity	64 inputs x 64 outputs. (Can be configured in steps of 16 from 16x16 to 64x64 in symmetric and asymmetric configurations).	
Routing	Combining, non-blocking	Many inputs can be routed to each output
Frequency Range	850-2150 MHz	
Switching Time	<50ms	From receipt of a command to implementation of path change
Input RF Power	+20dBm	Absolute maximum

Environmental		
Operating Temperature	0 to 45°C	
Gain Stability versus Temperature	0.05dB/°C	
Location	Indoor use only	
Storage Temperature	-20°C to +75°C	
Humidity	20 to 90% non-condensing	
Altitude	operational	10,000 ft AMSL (above mean sea level)
	storage	30,000 ft AMSL (above mean sea level)

RF Parameters					
RF Connectors & Impedances	50Ω SMA	50Ω BNC	75Ω BNC	75Ω F-type	
Gain (Typical, mean across band)	0±1 dB	0±1 dB	0±1 dB	0±1 dB	
Gain Flatness	Full band	±1.25 dB	±1.25 dB	±1.50 dB	±1.50 dB
	Any 36MHz	±0.30 dB	±0.30 dB	±0.50 dB	±0.50 dB
Input Return Loss	Typical	20 dB	20 dB	16 dB	16 dB
	Minimum	12 dB	12 dB	10 dB	10 dB
Output Return Loss	Typical	20 dB	20 dB	16 dB	16 dB
	Minimum	14 dB	12 dB	10 dB	10 dB
Isolation (Minimum between any two ports)	I/P - I/P	75 dB			
	O/P - O/P	75 dB			
	I/P - O/P	60 dB			
Noise Figure (Typical, with one input routed to one output)	Typical	12 dB			
	Maximum	16 dB			
1 dB GCP Output power.	Typ. 0 dBm				
OIP3 3rd order intercept point, output power	Typical	12 dBm			
	Minimum	10 dBm			
OIP2 2nd order intercept point, output power	Typical	24 dBm			
	Minimum	20 dBm			
Group Delay	≤ 1 ns Variation across the operational bandwidth.				

Power		
PSU Power	85-264Vac 50-60Hz	Fused 2A
AC Consumption	350W	Max. consumption at steady state

Reliability		
PSU	Dual redundant & alarmed Hot-swap	
CPU	Dual redundant Hot-swap	
Input Cards	Hot-swap	
Output Cards	Hot-swap	
Matrix Cards	Hot-swap	
MTTR	20 minutes 15 minutes to retrieve spare part & 5 minutes to replace	
MTBF (Hours)	Chassis	>250,000 chassis excludes HMI & RF cards
	Switch Card	>250,000
	Divider Card	>300,000
	Matrix Card	>100,000

System Control & Monitoring	
Local Control & Monitoring	Via Front Panel HMI capacitive touchscreen
Remote Control & Monitoring	Ethernet via RJ45, 10BaseT/100BaseTx ETL TCP/IP protocol SNMPv3 HTTPS Built-in Web Server
Alarms	Via Ethernet (RJ45)

Physical	
Dimensions	5U high x 550mm deep x 19" wide
Weight	40 kg
Colour	RAL9003 - White (semi-matte)

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.  
Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.



**Esatcom Inc**  
[www.esatcom.com](http://www.esatcom.com)  
Tel: 718.276.0800  
Email: [sales@esatcom.com](mailto:sales@esatcom.com)

