



StingRay RF over Fibre

DWDM (Dense Wavelength Division Multiplexing),
40 wavelengths, up to 500 km distance,
200 series **L-band module** with ultra high
gain receive module for increased optical
budget


The StingRay DWDM 200 Series of L-band RF over fibre units are designed to provide compact fibre links, with forty wavelengths on a single fibre cable, and transmission distance of up to 500 km with optical amplifiers. The transmit modules benefit from a high and wide dynamic range with automatic link optimisation ensuring high quality L-band transmission.

The StingRay DWDM system comprises of transmit modules and a multiplexer module to combine up to 40 wavelengths on to a single fibre cable at the transmit end. A demultiplexer module and receive modules are then used at the receive end to split the separate wavelengths.

For more wavelengths and longer distances, please contact us.

Typical applications:

- Ku-band and Ka-band ready for HTS applications
- Long distance distribution of comms traffic across site with minimal loss - up to 500 km distances
- General satcoms – teleports, video head-ends, TVRO
- Compact solution for small quantity links such as tactical HQ

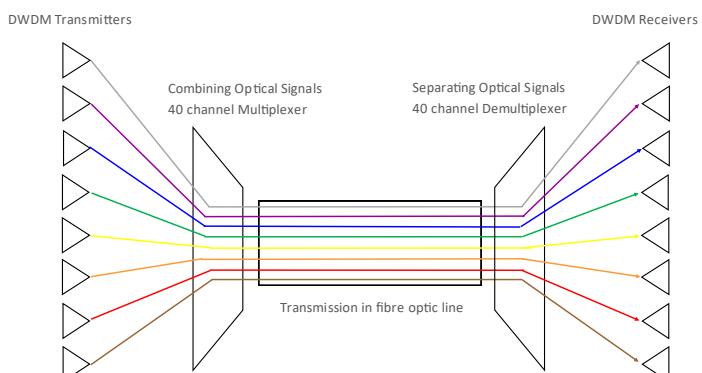

Fibre Modules



850 - 2450 MHz
operating frequency range



Up to 40 wavelengths on
a single fibre cable



Up to 500 km transmission
distance with transmit, receive and
optical amplifier module options



LNB Powering 13/18V on
TX modules only



High isolation between
modules for signal quality

Chassis Options



Compact indoor & outdoor chassis options, which
can be part populated



Indoor chassis showing hot-swap
power supply modules, fibre
modules and fans



Remote control & monitoring via RJ45 Ethernet
port with SNMP & web browser interface



Local control & monitoring via front panel push
buttons & display




Resilience from dual redundant hot-swap power
supplies, hot-swap fibre modules & fans



Outdoor Unit (ODU)



10MHz Inject from an external source
chassis option





RF Parameters (TX & RX Modules)				
Model Number		SRY-TxxL1-257 DWDM L-band Transmit Fibre Module	SRY-RX-L1-258 DWDM L-band Receive Fibre Module	
Frequency Range		850 to 2450 MHz (Extended L-band)		
Flatness	850-2150MHz	± 1 dB	± 1.0 dB	
	850-2450MHz	± 1.5 dB	± 1.5 dB	
	Any 36MHz i/p >-50 dBm	± 0.25 dB (Full TX&RX link with 10km fibre link using SRY-RX-L1-242. Fixed gain mode)	± 0.25 dB (Full TX&RX link with 10km fibre link using SRY-TxxL1-257. Fixed gain mode)	
	Any 36MHz i/p <-50 dBm	± 0.5 dB (Full TX&RX link with 10km fibre link using SRY-RX-L1-242. Fixed gain mode)	± 0.25 dB (Full TX&RX link with 10km fibre link using SRY-TxxL1-257. Fixed gain mode)	
Output AGC Flatness		-	± 2.5 dB over full band	
AGC/MSG		AGC: Factory set (once AGC level set, gain can be fixed)	AGC/MSG: Settable output power level (once AGC level set, gain can be fixed)	
Return Loss	Typical	18 dB typ. 12dB min. 50Ω SMA (All RF Connectors are Female)	18 dB typ. 12 dB min. 50Ω SMA 18 dB typ. 12 dB min. 50Ω BNC 16 dB typ. 12 dB min. 75Ω BNC 16 dB typ. 12 dB min. 75Ω F-Type (All RF Connectors are female. All RF Ports are DC blocked)	
	Minimum			
Monitor Port		-20 dB ± 3 dB Mounted on module		
OIP3		17 dBm typical, 14 dBm worst case	17 dBm typical, 14 dBm worst case	
		(Test condition: SRY-RX-L1-242, 20km fibre, 10 dB gain, -22 dBm tones at 2150 & 2152 MHz)	(Test condition: SRY-TxxL1-257, 1m fibre, 10 dB gain, -22 dBm tones at 2150 & 2152 MHz)	
CNR (in any 36 MHz)		50 dB typical, 45 dB worst case	-83 dB typical, -78 dB worst case	
		(Test condition: SRY-RX-L1-242, 20km fibre, 10 dBm RF i/p power, -10 dBm RF o/p power)	(Test condition: SRY-TxxL1-257, 1m fibre, -10 dBm RF i/p power, -10 dBm RF o/p total power)	
Noise Figure		25dB Typical	15dB Typ., 20 dB Max	
		(Test condition: SRY-RX-L1-242, 20km fibre, -50 dBm RF i/p power, -10 dBm RF o/p power)	(Test condition: SRY-TxxL1-257, 1m fibre, -50 dBm RF i/p power, -10 dBm o/p power)	
Group Delay Variation		2ns over Full band, 1ns over any 36MHz		
SFDR		105 dB/Hz ^{2/3} typical , 100 dB/Hz ^{2/3} minimum	110 dB/Hz ^{2/3} typical , 105 dB/Hz ^{2/3} minimum	
		(Test condition: SRY-RX-L1-242, 20km fibre, 10 Db gain, -22 dBm tones at 2150 and 2152 MHz)	(Test condition: SRY-TxxL1-257, 1m fibre, 10 dB gain, -22 dBm tones at 2150 and 2152 MHz)	
IMD3		-65 dBc typical , -60 dBc minimum	-	
		(Test condition: SRY-RX-L1-242, 20km fibre, 10 Db gain, -22 dBm tones at 2150 and 2152 MHz)	-	
RF Signal Range		Input: -50 to -10 dBm (total power) Operational i/p range	Output: -30 to -10 dBm (total power) o/p range for optical loss	
Max RF Input		16 dBm total power (Damage level, NOT operational)	-	
Laser Type		DFB Optical isolator for improved performance	-	
Optical Wavelength		DWDM C-band see centre wavelengths table	1100 to 1650 nm optimised for 1310nm and 1550nm	
Optical Power		Output: 8 ± 2 dBm	Input: -17 to +5 dBm (Max. 10 dBm)	
Power Consumption		20W typical	5.5W typical	
LNB Power		18/13V ±5%, Up to 500 mA per channel (short circuit current 750 mA max)	-	
MTBF		TBC	> 250,000 hours	
Connector Options		RF connectors: -S5 For 257 module only, S5, B5,F7, B7 available for 258 module Optical Connectors: FA - FC/APC or SA - SC/APC (Single Mode Fibre. Angle Polish Connectors Only)		
Environmental Conditions				
Operating Temperature	-20°C to 50°C		-20°C to 60°C	
Storage Temperature	-40°C to 85°C		-40°C to 90°C	
Humidity	20 to 90 %, non-condensing			
Location	Indoor use only. Outdoor use part of ETL ODU only.			

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Please see separate datasheet for 200 series chassis options

