



ETL Systems
New technologies
in RF distribution

Model Number:
FN-U-KXL1-24258-xxxx

Falcon Series


Frequency Converter Module

L-Band Agile Upconverter

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

Converting L-band to K-band. The 1U chassis has the capacity for up to five hot-swap frequency converter modules. These can be all upconverters, all downconverters or a mix of both.

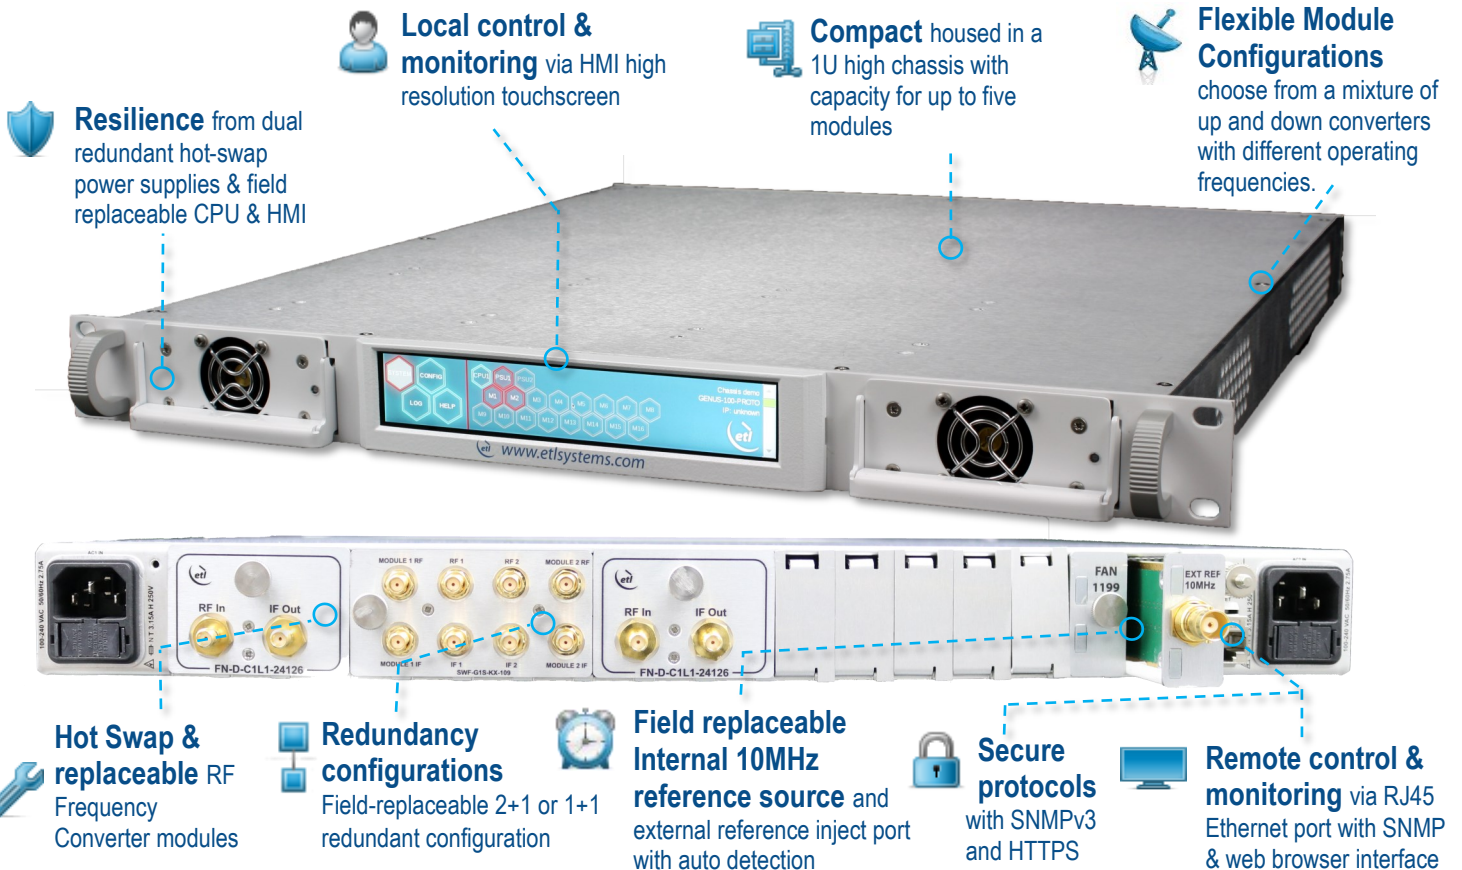

Chassis - Specification


Dimensions / Weight / Colour	1U high x 550mm deep x 19" wide / <10 kg / RAL9003—White (Semi-matte)
Capacity	Total of 17 module slots. Note that 1 slot may be used for fan (if required) and 1 slot may be used for 10 MHz EXT inject module (if required). Note actual modules may require >1 slot. Refer to required module spec table.
Temperature	Operating: 0°C to +45°C / Storage: -20°C to +75°C
Location / Humidity / Altitude	Indoor use only / 20 to 90% non-condensing / 10,000 feet AMSL (Operational) 30,000 feet AMSL (Storage) Above Mean Sea Level
Control & Monitoring	Local: HMI touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. TCP/IP, SNMP V3 & HTTPS & Web browser interface HMI and CPU field replaceable. Each module independently monitored and reported.
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace) Applies to LRUs only and assumed in house stock
AC Input / Consumption	85-264Vac 50/60Hz / 150W
PSU Redundancy	Dual redundant and alarmed Diode OR. Hot swappable
Input & Output ports	Dependant upon module fitted





ETL Systems
New technologies
in RF distribution

Model Number:
FN-U-KXL1-24258-xxxx

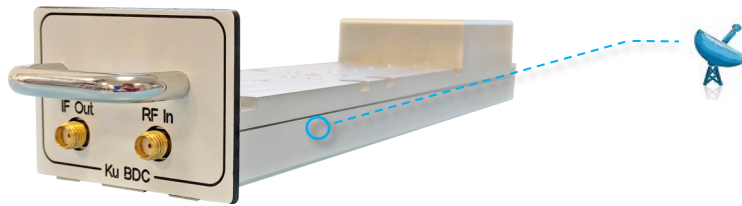

Frequency Converter Module
Compact form factor allowing multiple modules to be housed in 1U chassis.
Each module uses 3 slots in the chassis.

Frequency Downconverter Module - RF Parameters			Redundancy Module - RF Parameters	
Model Numbers		FN-U-KXL1-24258-XXXX	SWF-G1S-QX-108A-xxxx	SWF-G1S-QX-106-xxxx
Size		3 slots wide	4 slots wide	6 slots wide
Redundancy		Standalone Module	1+1 (Note. This column denotes specs for 24258 in 1+1 configuration)	2+1 (Note. This column denotes specs for 24258 in 2+1 configuration)
Input Frequency Range		950—2150 MHz		
Output Frequency Range		17.3—21.2 GHz (Commands in 1kHz step. Min output freq @ 2150 MHz in = 18.5 GHz. Max output freq @ 950 MHz in = 20.0 GHz)		
Conversion Gain	Max.	35 ± 2 dB	31.0 ± 2 dB	27.7 ± 2 dB
	Min.	5 ± 1.5 dB	1.0 ± 1.5 dB	-2.3 ± 1.5 dB
Gain Steps		0.5 ± 2.5 dB		
Gain Flatness		Full IF Band ±1.75 dB Any 40 MHz ±0.3 dB		
Input Return Loss (L-band)		Typ -18 dB / Min.-14 dB	Typ -15dB / Min -12.0dB	Typ -15dB / Min -12.0dB
Output Return Loss (K-Band)		Typ. -15 dB / Min.-10 dB	Typ -11dB / Min -8.0dB	Typ -11dB / Min -7.0dB
Noise Figure		Typ. 10 dB / Max. 12 dB	Typ 11.0dB / Max 13.1dB	Typ 12.8dB / Max 15.0dB
Input Power Range		-75 to -35 dBm		
OP1dB		Typ. +8 dBm at max gain / Min.+5 dBm	Typ. +5.0dBm / Min. +2.0dBm	Typ. +3.0dBm / Min. 0dBm
OIP3		Typ. +18 dBm at max gain / Min.+15 dBm	Typ. +15.0dBm / Min. +12.0dBm	Typ. +13.5dBm / Min. +10.5dBm
Slope Compensation		0-6 dB at L-band		
Slope Control Steps		1dB		
Group Delay (max pk-pk)		2 ns		
Internal Reference Stability		±5x10 ⁻⁸ over 0 to 50°C		
Phase Noise (Typical values)	@10Hz offset	-70 dBc / Hz		
	@100Hz offset	-80 dBc / Hz		
	@1KHz offset	-85 dBc / Hz		
	@10KHz offset	-85 dBc / Hz		
	@100KHz offset	-90 dBc / Hz		
	@1MHz offset	-110 dBc / Hz		
Spurs In-band (@ -5dBm Output)		Carrier related <-50 dBm Non-carrier related<-55 dBm (TBC)		
Spurs Out-of-band (@ -5dBm Output)		Carrier related <-50 dBc Non-carrier related<-60 dBm (TBC)		
LO Breakthrough		<-70 dBm (TBC)		
Image Rejection		> 60 dB typ (TBC)		
External Ref.		Input Frequency 10 MHz. 1 required per chassis. Target 5 MHz or 10 MHz Auto detection Input Level +3 dBm ± 3dB (Subject to change)		
Mute		60 dB		
IF Monitor Port		Yes. Internal RF detector monitored		
Number of conversion stages		Dual		
Spectral Inversion		Non-inverting		
Spec version		0.1	1.0	0.2

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.



Esatcom Inc.
www.esatcom.com
Tel: 718.276.0800
Email: sales@esatcom.com

