
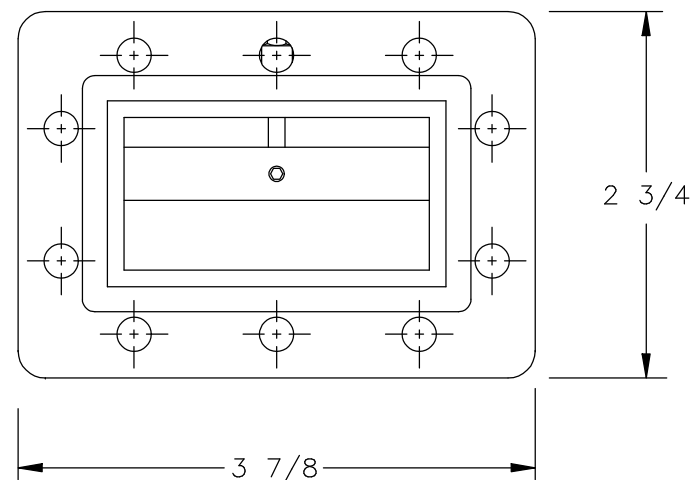


THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND
MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC.
THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APPR'D

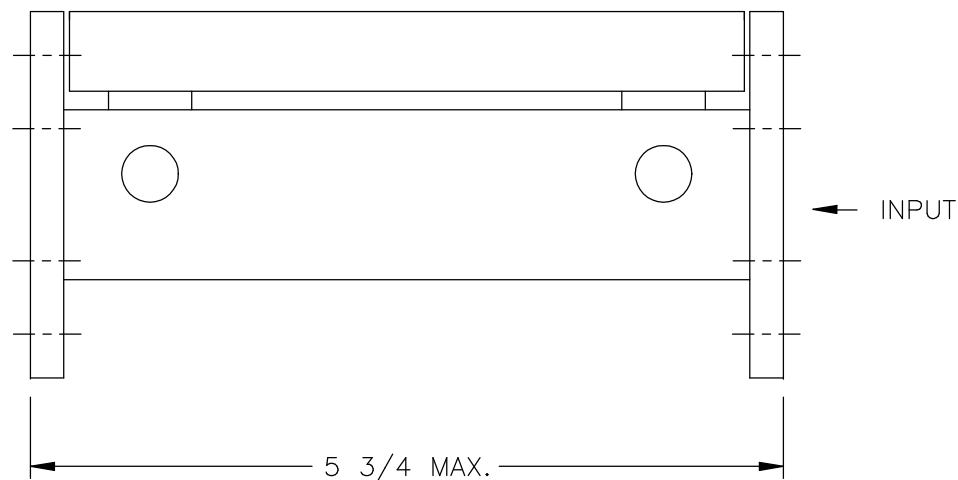

SPECIFICATIONS

PASSBAND:	3600-4050 MHz
PASSBAND INSERTION LOSS:	0.4 dB TYP. @ F _o 0.5 dB ROLL OFF @ BAND EDGE
PASSBAND VSWR:	1.33:1 MAX.
DELAY VARIATION:	LESS THAN 8 ns TYP
REJECTION:	FREQUENCY:
25 dB TYP	3550 MHZ
25 dB TYP	4100 MHZ
60 dB TYP	4200 MHZ

WEIGHT:	2.5 lbs
FLANGES:	CPR-229 W/SUPPLIED HALF GASKET GROOVED FLANGE (INPUT SIDE) FLAT FLANGE (OUTPUT SIDE)

UNLESS SPECIFIED
ALL TOLERANCES ± 0.030

ENVELOPE DRAWING

MFC MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE	7/08	TITLE	
DWN BY	PMB	BANDPASS FILTER	
ENGINEER	K.G.	DRAWING NO.	REV
		7894D-3600/4050	—