

2207HDCN

2000 Dual-Band Ku-Band PLL LNB (0.7 dB)

Frequency: C: 10.95 - 11.70 GHz | 12.25 - 12.75 GHz

L.O. Stability: +/- 25 kHz
Output Connector: N: 50 Ohm





KEY SPECIFICATIONS

Band	Ku-Band
Input Frequency Band 1	10.95 - 11.70 GHz
Input Frequency Band 2	12.25 - 12.75 GHz
LO Frequency 1	10.00 GHz
LO Frequency 2	11.30 GHz
LO Stability	±25 kHz
LO Type	PLL
Noise Figure Max	0.8 dB
Noise Figure Typ	0.7 dB
Number Of Onboard Los	Dual-Band Dual-Band
Output Frequency Band 1	950 - 1700 MHz
Output Frequency Band 2	950 - 1450 MHz
Tone Frequency	22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 6 dB p-p
Input VSWR	2.3 : 1 max.
Output P1db	+ 5 dBm min.





Output VSWR

2.2:1 max.

Phase Noise 0.1khz Offset Max

-125 dBc/Hz

Phase Noise 1khz Offset Max

-75 dBc/Hz

Phase Noise 10khz Offset Max

-80 dBc/Hz

Phase Noise 100khz Offset Max

-93 dBc/Hz

ELECTRICAL SPECIFICATIONS

Current Consumption350 mA maxPower Requirements+12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector N-Connector

RF Input Connector WR-75 waveguide grooved

ENVIRONMENTAL SPECIFICATIONS

Humidity 0 - 95%

IP Rating IP 66

Temperature Operational -40°C to +70°C
Temperature Storage -50 to +80°C

PHYSICAL SPECIFICATIONS

Product Height1.70 inProduct Length4.46 inProduct Weight0.255 kgProduct Width1.72 in

LOGISTICS SPECIFICATIONS


HS Code Country of Origin Ex Works ECCN Number Unit Package

Made in Canada Richmond, BC, Canada EAR99 135 x 68 x 48 mm | 0.335 kg


HOW TO ORDER






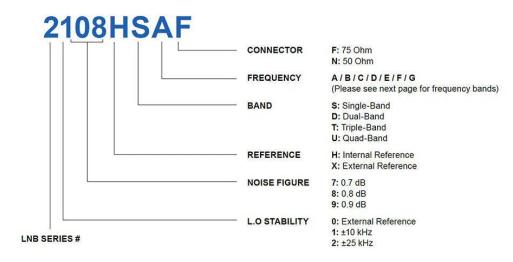

MECHANICAL DIAGRAMS



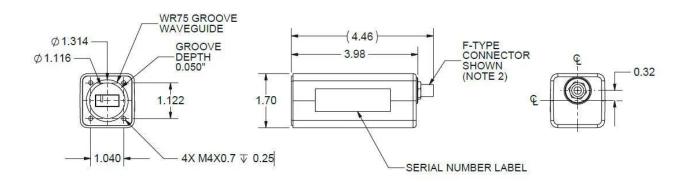



FREQUENCY BANDS

	Single Band					Dual Band					
Band	RF	freq (GHz)	L.O freq (GHz)	O	utput freq	Band	Band RF freq (GHz)		L.O freq (GHz)	Output freq	Voltage/Tone
Α		1.7 - 12.20	10.75		- 1450 MHz		Band 1	10.95 - 11.70	10	950 - 1700 MHz	13 V
B C		2.25 - 12.75	11.3 10		- 1450 MHz	A	Dana 1				
D	10.95 - 11.70 10.70-11.80		9.75	950 - 1700 MHz 950 - 2050 MHz		1	Band 2	11.70 - 12.75	10.75	950 - 2000 MHz	18 V
_			Triple Band				Band 1	10.70 - 11.70	9.75	950 - 1950 MHz	13 V
Band	RF	freq (GHz)	L.O freq (GHz)	Output freq	Voltage/Tone	В	Band 1	10.70 - 11.70	9.75	950 - 1950 MHZ	13 V
A	Band 1	10.95 - 11.70	10	950 - 1700 MHz	13 V		Band 2	11.70 - 12.75	10.75	950 - 2000 MHz	18 V
	Band 2	11.70 - 12.20	10.75	950 - 1450 MHz	13 V / 22 kHz	С	Band 1	10.95 - 11.70	10	950 - 1700 MHz	13 V
	Band 3	12.20 - 12.75	11.25	950 - 1500 MHz	18 V		Band 2	12.25 - 12.75	11.3	950 - 1450 MHz	18 V
	Band 1	10.95 - 11.70	10	950 - 1700 MHz	13 V	D	Band 1	10.70 - 11.70	9.75	950 - 1950 MHz	13 V
В	Band 2	11.70 - 12.25	10.75	950 - 1500 MHz	13 V / 22 kHz		Danu I	10.70 - 11.70	9.73	930 - 1930 WITZ	13 V
							Band 2	11.70 - 12.75	10.6	1100 - 2150 MHz	18 V
	Band 3	12.25 - 12.75	11.3	950 - 1450 MHz	18 V				Quad Band		
	Band 1	10.70 - 11.70	9.75	950 - 1950 MHz	13 V	Band	RF	freq (GHz)	L.O freq (GHz)	Output freq	Voltage/Tone
С	Band 2	11.70 - 12.20	10.75	950 - 1450 MHz	13 V / 22 kHz	A B	Band 1	10.70 - 11.20	9.75	950 - 1450 MHz	13 V
	Band 3	12.20 - 12.75	11.25	950 - 1500 MHz	18 V		Band 2	11.20 - 11.70	10.25	950 - 1450 MHz	13 V / 22 kHz
	Band 1	10.70 - 11.70	9.75	950 - 1950 MHz	13 V		Band 3	11.70 - 12.25	10.75	950 - 1500 MHz	18 V
D	Band 2	11.70 - 12.25	10.75	950-1500 MHz	13 V / 22 kHz		Band 4	12.25 - 12.75	11.3	950 - 1450 MHz	18 V / 22kHz
							Band 1	10.70 - 10.95	9.75	950 - 1200 MHz	13 V
	Band 3	12.25 - 12.75	11.3	950-1450 MHz	18 V		Band 2	10.95 - 11.70	10	950 - 1700 MHz	13 V / 22 kHz
	Band 1	10.95 - 11.70	10	950 - 1700 MHz	13 V		Band 3	11.70 - 12.25	10.75	950 - 1500 MHz	18 V
E	Band 2	11.55 - 12.25	10.6	950 - 1650 MHz	13 V / 22 kHz		Band 4	12.25 - 12.75	11.3	950 - 1450 MHz	18 V / 22kHz
	Band 3	12.20 - 12.70	11.25	950 - 1450 MHz	18 V		Band 1	10.70 - 11.20	9.75	950 - 1450 MHz	13 V
	Band 1	10.70 - 11.80	9.75	950 - 2050 MHz	13 V	С	Band 2	11.20 - 11.70	10.25	950 - 1450 MHz	13 V / 22 kHz
F	Band 2	10.95 - 12.10	10	950 - 2100 MHz	13 V / 22 kHz		Band 3	11.70 - 12.20	10.75	950 - 1450 MHz	18 V
	Band 3	11.70 - 12.75	10.75	950 - 2000 MHz	18 V		Band 4	12.20 - 12.75	11.25	950 - 1500 MHz	18 V / 22kHz
G	Band 1	10.70 - 11.70	9.75	950 - 1950 MHz	13 V		Band 1	10.95 - 11.45	10	950 - 1450 MHz	13 V
	Band 2	11.70 - 12.70	10.75	950 - 1950 MHz	13 V / 22 kHz	D	Band 2	11.45 - 11.95	10.5	950 - 1450 MHz	13 V / 22 kHz
							Band 3	11.70 - 12.20	10.75	950 - 1450 MHz	18 V
	Band 3	12.25 - 12.75	11.3	950 - 1450 MHz	18 V		Band 4	12.20 - 12.75	11.25	950 - 1500 MHz	18 V / 22kHz





Tel 718.799.0084

Email sales@esatcom.com