



ELMTBKU040-SF

ELEMENT 40W Ku-Band EXT REF MINIBUC

Input Frequency: 14.00 - 14.50 GHz

Input Connector: F-Connector

M&C Function: No M&C Function



KEY SPECIFICATIONS

Band	Ku-Band
External Ref Freq	10 MHz, -5 to +5 dBm
Input Frequency Band 1	950 - 1450 MHz
LO Frequency 1	13.05 GHz
Output Frequency Band 1	14.00 - 14.50 GHz
Output Power Rated	40W
Reference Type	External Reference

RF SPECIFICATIONS

Gain Flatness (over 54mhz)	1.5 dB
Gain Flatness (over Full Band)	4 dB
Gain Flatness (over Temperature)	4 dB
Input VSWR	2 : 1 max.
Linear Gain	72 dB typ.
Output P1db	+46 dBm min. over temperature
Output Spurious In Band	-60 dBc
Output Spurious Out Of Band	-50 dBc
Output VSWR	2 : 1 max.
Phase Noise 100khz Offset Max	-95 dBc/Hz
Phase Noise 10khz Offset Max	-140 dBc/Hz max.
Phase Noise 1khz Offset Max	-135 dBc/Hz max.

ELECTRICAL SPECIFICATIONS

Current Consumption	390W max.
---------------------	-----------





Power Requirements +36 to +60V DC

INTERFACE SPECIFICATIONS

Frequency Sense Non-inverted
 IF Connector F-Connector

ENVIRONMENTAL SPECIFICATIONS

Humidity Up to 100%
 IP Rating IP 55
 Temperature Operational -40 to +55°C

PHYSICAL SPECIFICATIONS


Internal Function Lock detector shuts off Tx in case of LO unlocked
 Product Dimensions (LxWxH) 245 x 125 x 125 mm
 Product Weight 4 kg

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8543700000	Made in Korea	Korea	EAR99	290 x 270 x 250 mm 4.5 kg

HOW TO ORDER

ELMTBKU040HT-EF-E

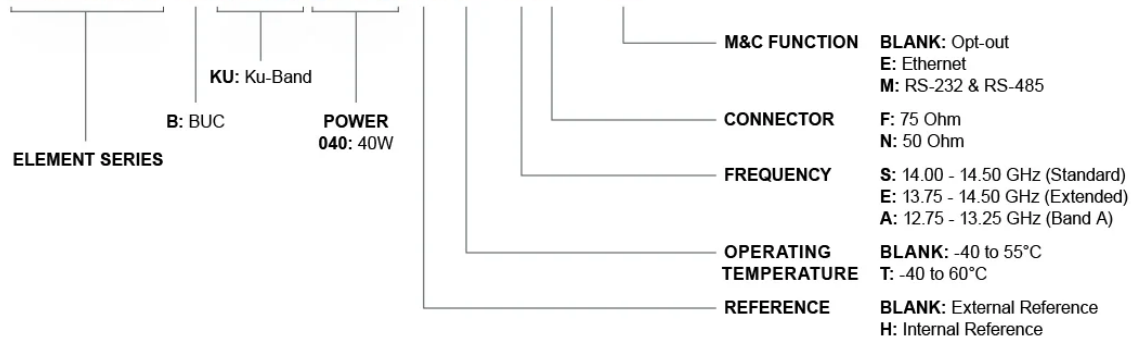

MECHANICAL DIAGRAMS



