

## **Innovative Communication Solutions**

# ELMTBC080HT-PN-

## AM

## **ELEMENT 80W C-Band BUC (High Temperature Range)**

Input Frequency: 6.425 - 6.725 GHz Input Connector: N-Connector

Input Voltage + M&C 85-265 VAC + RS-232 & amp;

Function: RS-485



## **KEY SPECIFICATIONS**

Band C-Band

External Ref Freq 10 MHz, -5 to +5 dBm

Input Frequency Band 1 1150 - 1450 MHz

LO Frequency 1 5.275 GHz

Output Frequency Band 1 6.425 - 6.725 GHz

**Output Power Rated** 80W

Reference Type Internal Reference

### RF SPECIFICATIONS

Gain Flatness (over 54mhz) 1.5 dB

Gain Flatness (over Full Band) 4 dB

Gain Flatness (over Temperature) 4 dB

Input VSWR 2:1 max.

Linear Gain 80 dB typ.

**Output P1db** +49 dBm min. over temperature

-85 dBc/Hz

**Output Spurious In Band** -60 dBc

**Output Spurious Out Of Band** -50 dBc

**Output VSWR** 2:1 max.

Phase Noise 100khz Offset Max -95 dBc/Hz Phase Noise 10khz Offset Max

Phase Noise 1khz Offset Max -75 dBc/Hz





## **Innovative Communication Solutions**

#### **ELECTRICAL SPECIFICATIONS**

Current Consumption 650W max.

Power Requirements +85 to +265V AC

#### INTERFACE SPECIFICATIONS

Frequency Sense Non-inverted

IF Connector N-Connector

#### **ENVIRONMENTAL SPECIFICATIONS**

Humidity Up to 100%

IP Rating IP 54

Temperature Operational -40 to +60 °CTemperature Storage -40 to +75 °C

#### PHYSICAL SPECIFICATIONS

Internal Function Lock detector shuts off Tx in case of LO unlocked


Product Dimensions (LxWxH) 235 x 190 x 145 mm

Product Weight 7.5 kg (+1.0 kg mounting jig)

#### LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8543700000	Made in Korea	Korea	EAR99	290 x 270 x 250 mm   8.5 kg

#### **HOW TO ORDER**

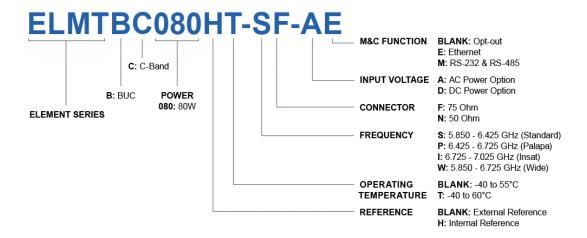

#### **MECHANICAL DIAGRAMS**





## **Innovative Communication Solutions**

