

Innovative Communication Solutions

ELMTBC080H-IN-A

ELEMENT 80W C-Band BUC

Input Frequency: 6.725 - 7.025 GHz Input Connector: N-Connector

Input Voltage + M&C 85-265 VAC + No M&C

Function: Function



KEY SPECIFICATIONS

Band C-Band

External Ref Freq 10 MHz, -5 to +5 dBm

Input Frequency Band 1 975 - 1275 MHz

LO Frequency 1 5.75 GHz

Output Frequency Band 1 6.725 - 7.025 GHz

Output Power Rated 80W

Reference Type Internal Reference

RF SPECIFICATIONS

Linear Gain

Gain Flatness (over 54mhz) 1.5 dB

Gain Flatness (over Full Band) 4 dB

Gain Flatness (over Temperature) 4 dB

Input VSWR 2:1 max.

80 dB typ.

Output P1db +49 dBm min. over temperature

Output Spurious In Band -60 dBc **Output Spurious Out Of Band** -50 dBc

Output VSWR 2:1 max.

Phase Noise 100khz Offset Max -95 dBc/Hz

Phase Noise 10khz Offset Max -85 dBc/Hz

Phase Noise 1khz Offset Max -75 dBc/Hz





Innovative Communication Solutions

ELECTRICAL SPECIFICATIONS

Current Consumption 650W max.

Power Requirements +85 to +265V AC

INTERFACE SPECIFICATIONS

Frequency Sense Non-inverted

IF Connector N-Connector

ENVIRONMENTAL SPECIFICATIONS

Humidity Up to 100%

IP Rating IP 54

Temperature Operational -40 to +55°C
Temperature Storage -40 to +75°C

PHYSICAL SPECIFICATIONS

Internal Function Lock detector shuts off Tx in case of LO unlocked


Product Dimensions (LxWxH) 235 x 190 x 145 mm

Product Weight 8.5 kg

LOGISTICS SPECIFICATIONS

| HS Code | Country of Origin | Ex Works | ECCN Number | Unit Package |
|------------|-------------------|----------|-------------|--------------------------------|
| 8543700000 | Made in Korea | Korea | EAR99 | 290 x 270 x 250 mm 8.5 kg |

HOW TO ORDER

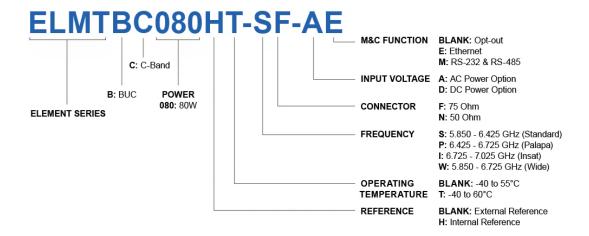

MECHANICAL DIAGRAMS





Innovative Communication Solutions

