

Innovative Communication Solutions

ELMTBC080-PN-AM

ELEMENT 80W C-Band EXT REF BUC

Input Frequency: P: 6.425 - 6.725 GHz

Input Connector: N-Connector

Input Voltage + M&C 85-265 VAC + RS-232 & amp;

Function: RS-485



KEY SPECIFICATIONS

Band C-Band

External Ref Freq 10 MHz, -5 to +5 dBm

Input Frequency Band 1 1150 - 1450 MHz

LO Frequency 1 5.275 GHz

Output Frequency Band 1 6.425 - 6.725 GHz

Output Power Rated 80W

Reference Type External Reference

RF SPECIFICATIONS

Gain Flatness (over 54mhz) 1.5 dB

Gain Flatness (over Full Band) 4 dB

Gain Flatness (over Temperature) 4 dB

Input VSWR 2:1 max. Linear Gain 80 dB typ.

Output P1db +49 dBm min. over temperature

Output Spurious In Band -60 dBc **Output Spurious Out Of Band** -50 dBc

Output VSWR 2:1 max.

Phase Noise 100khz Offset Max -95 dBc/Hz

Phase Noise 10khz Offset Max

-140 dBc/Hz max. Phase Noise 1khz Offset Max -135 dBc/Hz max.





Innovative Communication Solutions

ELECTRICAL SPECIFICATIONS

Current Consumption 650W max.

Power Requirements +85 to +265V AC

INTERFACE SPECIFICATIONS

Frequency Sense Non-inverted

IF Connector N-Connector

ENVIRONMENTAL SPECIFICATIONS

Humidity Up to 100%

IP Rating IP 54

Temperature Operational -40 to +55°C
Temperature Storage -40 to +75°C

PHYSICAL SPECIFICATIONS

Internal Function Lock detector shuts off Tx in case of LO unlocked


Product Dimensions (LxWxH) 235 x 190 x 145 mm

Product Weight 8.5 kg

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8543700000	Made in Korea	Korea	EAR99	290 x 270 x 250 mm 8.5 kg

HOW TO ORDER

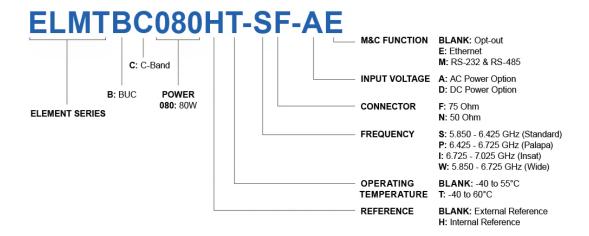

MECHANICAL DIAGRAMS





Innovative Communication Solutions

