
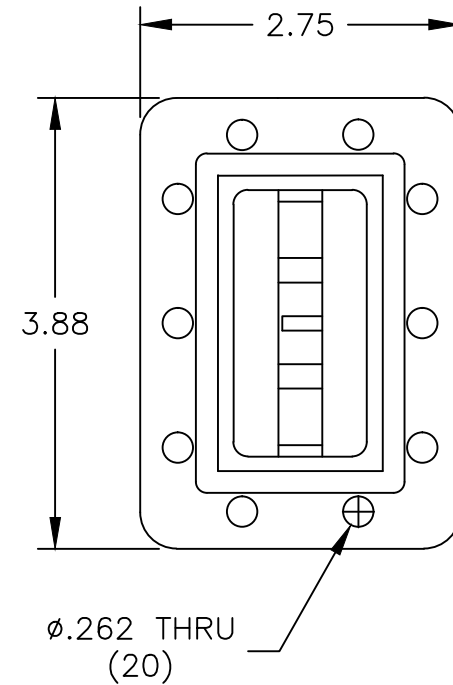


THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND
MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC.
THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APPR'D

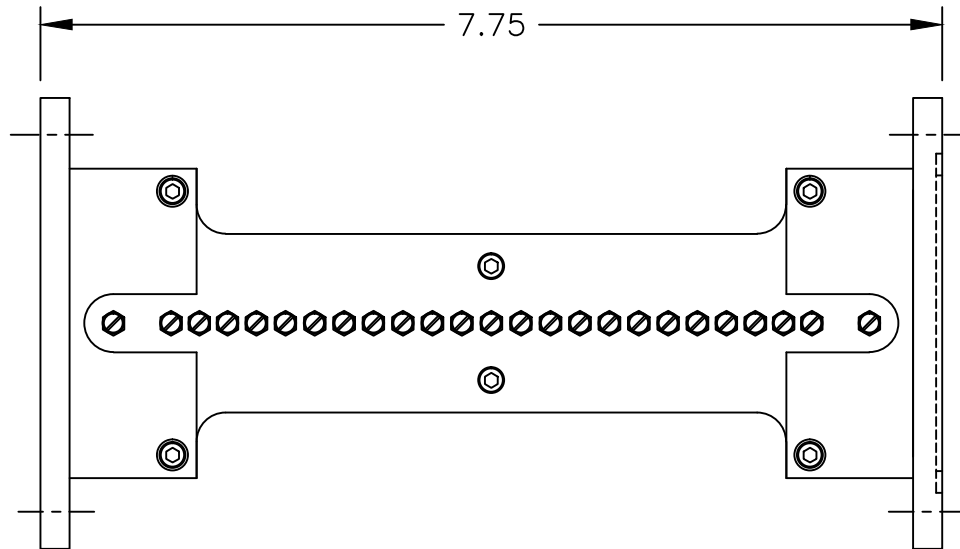


SPECIFICATIONS:

PASSBAND: 3.8–4.8 GHz
 INSERTION LOSS: 1.0 dB MAX
 PASSBAND V.S.W.R.: 1.5:1 MAX
 REJECTION: 65 dB MIN FROM 3.0 TO 3.6 GHz
 FLANGES: CPR229F (INPUT) / CPR229G (OUTPUT)
 OPERATING TEMP RANGE: –40°C TO +60°C
 WEATHERIZED FOR OUTDOOR USE

UNLESS SPECIFIED
ALL TOLERANCES ± 0.030

ENVELOPE DRAWING

		MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13057		FSCM27834	
DATE 1/25		TITLE BANDPASS FILTER			
DWN BY PMB					
ENGINEER R.P.		DRAWING NO. 21151		REV —	