

## 7500HUBF

### 7000 Quad-Band Ka-Band PLL LNB

**Frequency:** B: 17.50 - 18.50 GHz | 18.40 - 19.40 GHz |  
19.30 - 20.30 GHz | 20.20 - 21.20 GHz

**L.O. Stability:** +/- 50 kHz

**Output Connector:** F: 75 Ohm



## KEY SPECIFICATIONS

<b>Band</b>	Ka-Band
<b>Input Frequency Band 1</b>	17.50 - 18.50 GHz
<b>Input Frequency Band 2</b>	18.40 - 19.40 GHz
<b>Input Frequency Band 3</b>	19.30 - 20.30 GHz
<b>Input Frequency Band 4</b>	20.20 - 21.20 GHz
<b>LO Frequency 1</b>	16.55 GHz
<b>LO Frequency 2</b>	17.45 GHz
<b>LO Frequency 3</b>	18.35 GHz
<b>LO Frequency 4</b>	19.25 GHz
<b>LO Stability</b>	±50 kHz
<b>LO Type</b>	PLL
<b>Noise Figure Max</b>	1.5 dB
<b>Noise Figure Typ</b>	1.3 dB
<b>Number Of Onboard Los</b>	Quad-Band
<b>Output Frequency Band 1</b>	950 - 1950 MHz
<b>Output Frequency Band 2</b>	950 - 1950 MHz
<b>Output Frequency Band 3</b>	950 - 1950 MHz
<b>Output Frequency Band 4</b>	950 - 1950 MHz
<b>Tone Frequency</b>	22 kHz ± 4 kHz

## RF SPECIFICATIONS

<b>Control Signal 1</b>	13V / No Tone
<b>Control Signal 2</b>	13V / 22kHz Tone

## Innovative Communication Solutions

Control Signal 3	18V / No Tone
Control Signal 4	18V / 22kHz Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.

## ELECTRICAL SPECIFICATIONS

Current Consumption	450 mA max
Power Requirements	+12 to +24V DC

## INTERFACE SPECIFICATIONS

IF Connector	F-Connector
RF Input Connector	WR-42 Waveguide Grooved

## ENVIRONMENTAL SPECIFICATIONS

Humidity	0 - 100%
IP Rating	IP 66
Temperature Operational	-40°C to +70°C
Temperature Storage	-45 to +80°C

## PHYSICAL SPECIFICATIONS

Product Height	1.70 in
Product Length	4.67 in
Product Weight	0.4 kg
Product Width	1.72 in


## LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm   0.48 kg


## HOW TO ORDER



## 7200HSAF

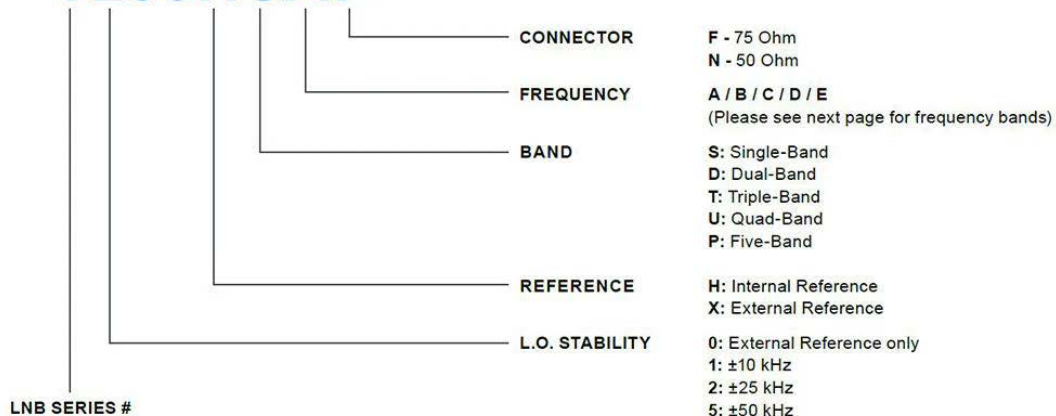

### MECHANICAL DIAGRAMS

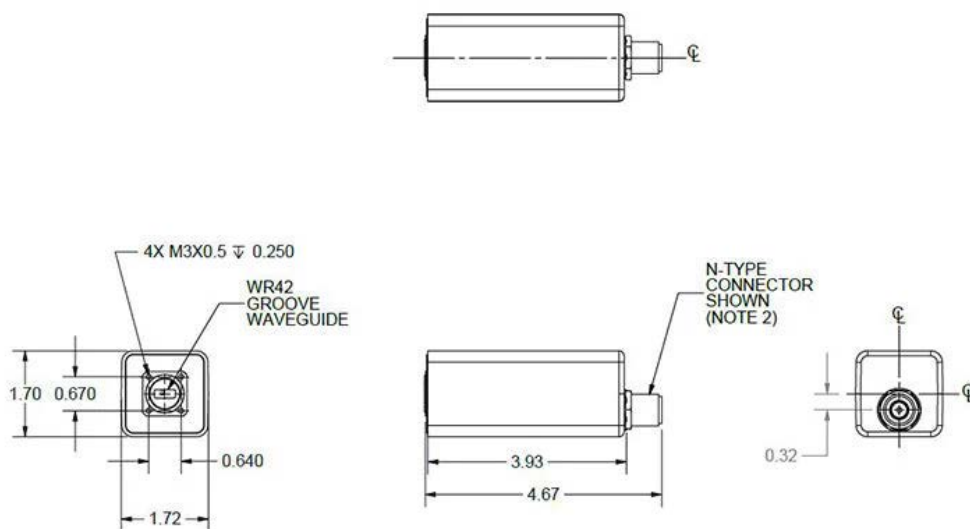



Norsat  
International Inc.

## Innovative Communication Solutions

Dual Band				Triple Band			
Band	RF freq. (GHz)		Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone
A	Band 1	17.75 - 18.75	13 V	A	Band 1	17.70 - 18.70	13 V
	Band 2	18.35 - 19.35	18 V		Band 2	18.45 - 19.45	13 V / 22 kHz
					Band 3	19.20 - 20.20	18 V
B	Band 1	18.20 - 19.20	13 V	B	Band 1	17.70 - 18.70	13 V
	Band 2	19.20 - 20.20	18 V		Band 2	18.70 - 19.70	13 V / 22 kHz
					Band 3	19.70 - 20.20	18 V
C	Band 1	18.40 - 19.40	13 V	C	Band 1	17.90 - 18.30	13 V
	Band 2	19.20 - 20.20	18 V		Band 2	18.30 - 19.30	13 V / 22 kHz
					Band 3	19.30 - 20.30	18 V
D	Band 1	19.20 - 20.20	13 V	D	Band 1	18.20 - 19.20	13 V
	Band 2	20.20 - 21.20	18 V		Band 2	19.20 - 20.20	13 V / 22 kHz
					Band 3	20.20 - 21.20	18 V
E	Band 1	17.20 - 18.20	13 V	E	Band 1	17.50 - 18.50	13 V
	Band 2	17.50 - 18.50	18 V		Band 2	18.20 - 19.20	13 V / 22 kHz
					Band 3	19.20 - 20.20	18 V
Quad Band				Five Band			
Band	RF Freq. (GHz)		Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone
A	Band 1	17.20 - 18.20	13 V	A	Band 1	17.20 - 18.20	13 V
	Band 2	18.20 - 19.20	13 V / 22 kHz		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 3	19.20 - 20.20	18 V				
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18.70 - 19.70	18 V
B	Band 1	17.50 - 18.50	13 V		Band 4	19.40 - 20.40	18 V / 22 kHz
	Band 2	18.40 - 19.40	13 V / 22 kHz				
	Band 3	19.30 - 20.30	18 V	Band 5	20.30 - 21.30	24 V	
	Band 4	20.20 - 21.20	18 V / 22 kHz				