

Innovative Communication Solutions

7000XDBF

7000 Dual-Band Ka-Band PLL LNB

Frequency: B: 18.20 - 19.20 GHz | 19.20 - 20.20 GHz L.O. Stability: External Reference Output Connector: F: 75 Ohm

CE 🖌





KEY SPECIFICATIONS

Band	Ka-Band
Input Frequency Band 1	18.20 - 19.20 GHz
Input Frequency Band 2	19.20 - 20.20 GHz
LO Frequency 1	17.25 GHz
LO Frequency 2	18.25 GHz
LO Stability	Ext Ref
LO Туре	PLL
Noise Figure Max	1.5 dB
Noise Figure Typ	1.3 dB
Number Of Onboard Los	Dual-Band
Output Frequency Band 1	950 - 1950 MHz
Output Frequency Band 2	950 - 1950 MHz
Tone Frequency	22 kHz ± 4 kHz

RF SPECIFICATIONS

Control Signal 1	13V / No Tone
Control Signal 2	18V / No Tone
Conversion Gain Max	65 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	60 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 5 dBm min.






Innovative Communication Solutions

ELECTRICAL SPECIFICATION	NS				
Current Consumption	450 mA max				
Power Requirements	+12 to +24V DC	+12 to +24V DC			
INTERFACE SPECIFICATION	S				
IF Connector	F-Connector				
F Input Connector WR-42 Waveguide Grooved					
ENVIRONMENTAL SPECIFIC	ATIONS				
Humidity	0 - 100%				
IP Rating	IP 66				
Temperature Operational	-40°C to +70°C				
Temperature Storage	-45 to +80°C				
PHYSICAL SPECIFICATIONS					
Product Height	1.70 in				
Product Length	4.67 in				
Product Weight	0.4 kg				
Product Width	1.72 in				

LOGISTICS SPECIFICATIONS

HS Code	ode Country of Origin		ECCN Number	Unit Package	
	Made in Canada	Richmond, BC, Canada	EAR99	135 mm x 68 mm x 48 mm 0.48 kg	

HOW TO ORDER

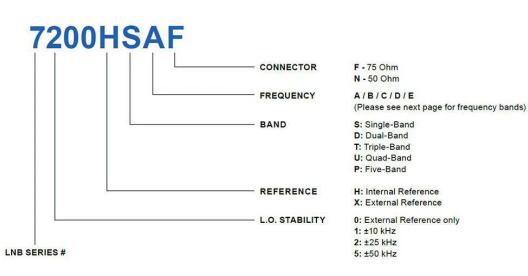



MECHANICAL DIAGRAMS



Innovative Communication Solutions





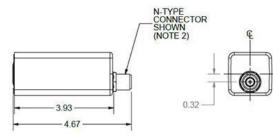

		Dual Band				Triple Band	
Band	RF freq. (GHz)		Voltage/Tone	Band	Band RF Freq. (GHz)		
A -	Band 1	17.75 - 18.75	13 V		Band 1	17.70 - 18.70	13 V
		The second	Concernent (A	Band 2	18.45 - 19.45	13 V / 22 kHz
_	Band 2	18.35 - 19.35	18 V	_	Band 3	19.20 - 20.20	18 V
в	Band 1	18.20 - 19.20	13 V	в	Band 1	17.70 - 18.70	13 V
		10.00 00.00	18 V		Band 2	18.70 - 19.70	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.70 - 20.20	18 V
с	Band 1	18.40 - 19.40	13 V	c	Band 1	17.90 - 18.30	13 V
			1011		Band 2	18.30 - 19.30	13 V / 22 kHz
	Band 2	19.20 - 20.20	18 V		Band 3	19.30 - 20.30	18 V
	Band 1	19.20 - 20.20	13 V	279.65	Band 1	18.20 - 19.20	13 V
D			72707	D	Band 2	19.20 - 20.20	13 V / 22 kHz
	Band 2	20.20 - 21.20	18 V		Band 3	20.20 - 21.20	18 V
E	Band 1	17.20 - 18.20	13 V	E	Band 1	17.50 - 18.50	13 V
	Band 2	17.50 - 18.50	18 V		Band 2	18.20 - 19.20	13 V / 22 kHz
	Band 2	MARKED BURNER	18 V		Band 3	19.20 - 20.20	18 V
		Quad Band				Five Band	
Band	RI	F Freq. (GHz)	Voltage/Tone	Band	RF Freq. (GHz)		Voltage/Tone
A -	Band 1	17.20 - 18.20	13 V	A	Band 1	17.20 - 18.20	13 V
	Band 2	18.20 - 19.20	13 V / 22 kHz		Arrested by Dec.		
	Band 3	19.20 - 20.20	18 V		Band 2	18.00 - 19.00	13 V / 22 kHz
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 3	18,70 - 19,70	18 V
в	Band 1	17.50 - 18.50	13 V		Banu 3	18.70 - 19.70	10 V
	Band 2	18.40 - 19. <mark>4</mark> 0	13 V / 22 kHz		Band 4	19.40 - 20.40	18 V / 22 kHz
	Band 3	19.30 - 20.30	18 V		224 100		2000
	Band 4	20.20 - 21.20	18 V / 22 kHz		Band 5	20.30 - 21.30	24 V



Esatcom Inc Norsat authorized distributor www.esatcom.com

Tel 718.799.0084 Email sales@esatcom.com