

5500N

5000 C-Band Single Band PLL LNB

L.O Stability: 5: ± 50 kHz

Output Connector: N: 50 Ohm



KEY SPECIFICATIONS

Band	C-Band
Input Frequency Band 1	3.40 - 4.20 GHz
LO Frequency 1	5.15 GHz
LO Stability	± 50 kHz
LO Type	PLL
Noise Figure Max	30K
Noise Figure Typ	15K
Number Of Onboard Los	Single-Band
Output Frequency Band 1	950 - 1750 MHz

RF SPECIFICATIONS

Conversion Gain Max	70 dB
Conversion Gain Min	55 dB
Conversion Gain Typ	62 dB
Gain Flatness (over Full Band)	≤ 5 dB p-p max.
Input VSWR	2.5 : 1 max.
Output P1db	+ 10 dBm min.
Output VSWR	2.5 : 1 max.
Phase Noise 1khz Offset Max	-65 dBc/Hz
Phase Noise 10khz Offset Max	-80 dBc/Hz
Phase Noise 100khz Offset Max	-95 dBc/Hz

ELECTRICAL SPECIFICATIONS

Current Consumption	250 mA max.
Power Requirements	+12 to +24V DC

INTERFACE SPECIFICATIONS

IF Connector	N-Connector
RF Input Connector	CPR 229G waveguide grooved



ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 67
Temperature Operational	-40°C to +60°C
Temperature Storage	-50 to +70°C

PHYSICAL SPECIFICATIONS


Product Height	70 mm
Product Length	179 mm
Product Weight	0.575 kg
Product Width	99 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	190 x 115 x 77 mm 0.66 kg

HOW TO ORDER

5500F

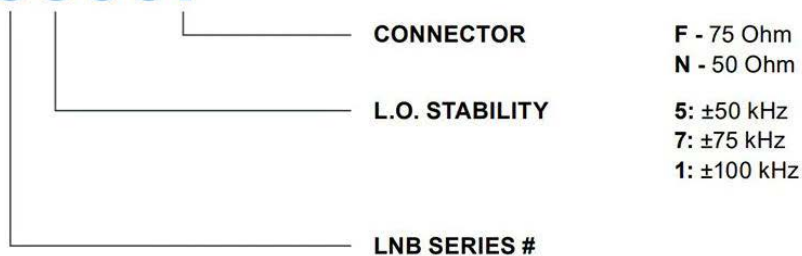


MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

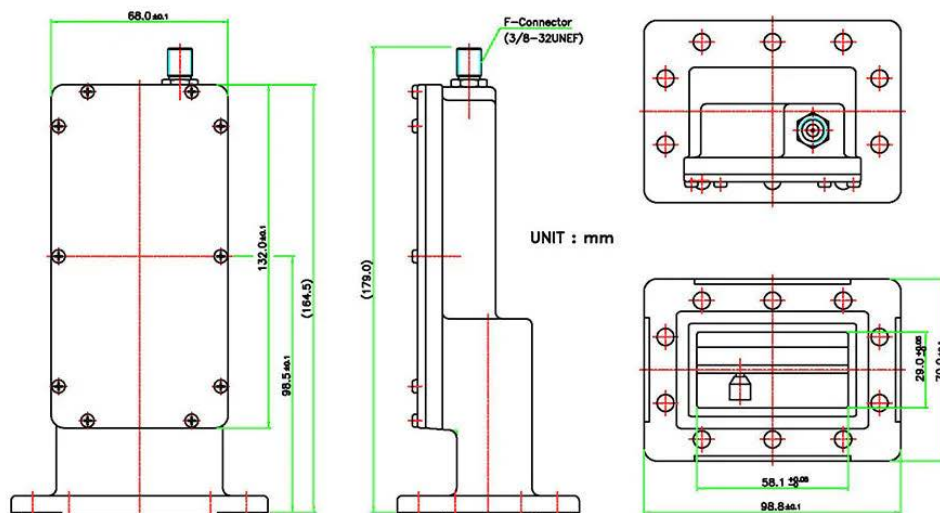

Norsat
International Inc.

ESATCOM
INC

Esatcom Inc
Norsat authorized distributor
www.esatcom.com

Tel
718.799.0084

Email
sales@esatcom.com