



RSLNBXSX12T10


LNB Redundant Switch System

Single-Band 1:2

Component: LNBXS = LNB External Ref Single-Band

Band: X-Band

Tx/Rx Config + IFL Length: Tx/Rx + 100m IFL

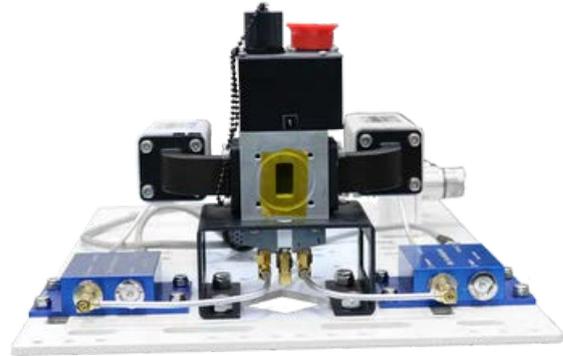

[Explore Video Course](#)



KEY SPECIFICATIONS

Band	X-Band
Redundancy	1:2
Switchover Time	120 ms max.

RF SPECIFICATIONS

Input VSWR	LNB Dependent
Insertion Loss	0.5 dB max.

ELECTRICAL SPECIFICATIONS

Power	90 - 264 VAC (47 - 63 Hz)
-------	---------------------------

INTERFACE SPECIFICATIONS

Component	LNB, External Ref, Single Band
IFL Cable Length	100m
RF Input Connector	X- Band: WR-112
RF Output Connector	N-Connector
Tx Rx Configuration	Tx / Rx

ENVIRONMENTAL SPECIFICATIONS



Relative Humidity	< 100%
Temperature Operational	-40°C to +60°C

PHYSICAL SPECIFICATIONS


Product Height	295 mm
Product Length	483 mm
Product Weight	9 kg
Product Width	159 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	584 x 661 x 686 mm 54.8 kg

HOW TO ORDER

RSLNBISKU11R3

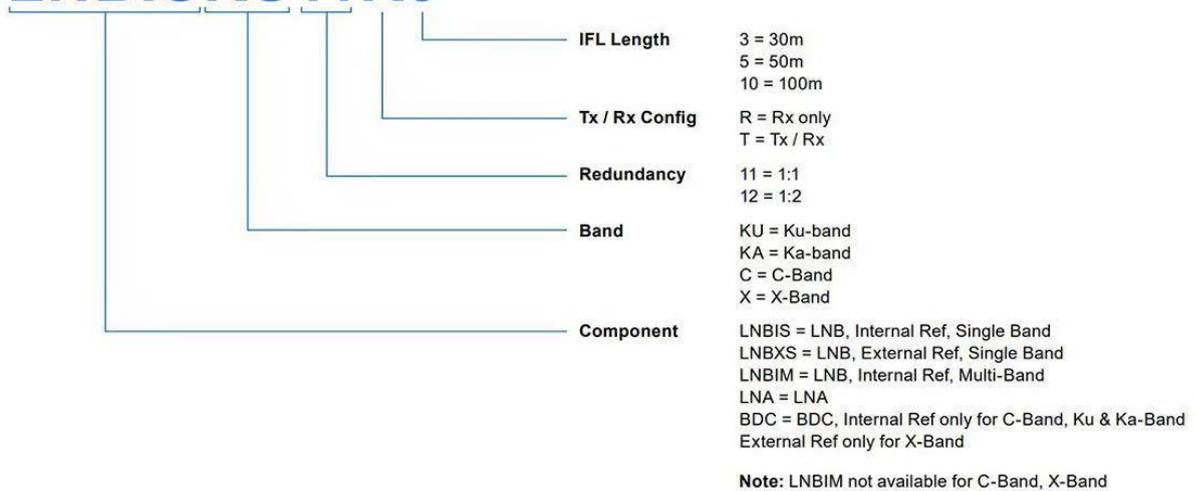

MECHANICAL DIAGRAMS

