

1008DXF-2

1000 Ku-Band Simultaneous Band EXT REF LNB

Frequency: 2: L 10.95 - 11.7 GHz | H 11.7 - 12.75 GHz

Output Connector: F: 75 Ohm

Norsat's Low Noise Blocks (LNBs) provide signal reception for satellite communications around the world. We offer premium performance and reliability in the smallest form factor possible. All of our standard Ku-Band LNBs are backed by a 3 year warranty and nearly forty years of experience as the industry's leading provider of high performance LNBs

Note: The products are available in two distinct revisions.
For detailed specifications and differences, please refer to the respective datasheets for each version in the document section below.



KEY SPECIFICATIONS

Band	Ku-Band
Input Frequency Band 1	L: 10.95 - 11.70 GHz
Input Frequency Band 2	H: 11.70 - 12.75 GHz
LO Frequency 1	L: 10.00 GHz
LO Frequency 2	H: 10.75 GHz
LO Stability	Ext Ref
LO Type	EXT
Noise Figure Max	.85 dB
Noise Figure Typ	0.8 dB
Number Of Onboard Los	Simultaneous Band
Output Frequency Band 1	L: 950 - 1700 MHz
Output Frequency Band 2	H: 950 - 2000 MHz

RF SPECIFICATIONS

Conversion Gain Max	62 dB
Conversion Gain Min	50 dB
Conversion Gain Typ	55 dB
Gain Flatness (over Full Band)	≤ 4 dB p-p
Input VSWR	2.2 : 1 max.
Output P1db	+ 5 dBm min.



Output VSWR	2.0 : 1 max.
Phase Noise 100khz Offset Max	Depends on External Reference

ELECTRICAL SPECIFICATIONS

Current Consumption	450 mA max. (each band)
Power Requirements	+12 to +24V DC (each band)

INTERFACE SPECIFICATIONS

IF Connector	F-Connector
RF Input Connector	WR-75 waveguide grooved

ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 67
Temperature Operational	-40°C to +60°C
Temperature Storage	-50 to +70°C

PHYSICAL SPECIFICATIONS

Product Height	40 mm
Product Length	155 mm
Product Weight	0.45 kg
Product Width	42 mm

LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in the Republic of Korea	Richmond, BC, Canada	EAR99	145 x 95 x 65 mm

HOW TO ORDER

1008DXN-1



FREQUENCY (OPTION)	1: L 10.7 - 11.7 GHz H 11.7 - 12.75 GHz 2: L 10.95 - 11.7 GHz H 11.7 - 12.75 GHz
CONNECTOR	F - 75 Ohm N - 50 Ohm
EXTERNAL REFERENCE	
NOISE FIGURE	08 - 0.8 dB
LNB SERIES #	

MECHANICAL DIAGRAMS



Norsat
International Inc.

Innovative Communication Solutions

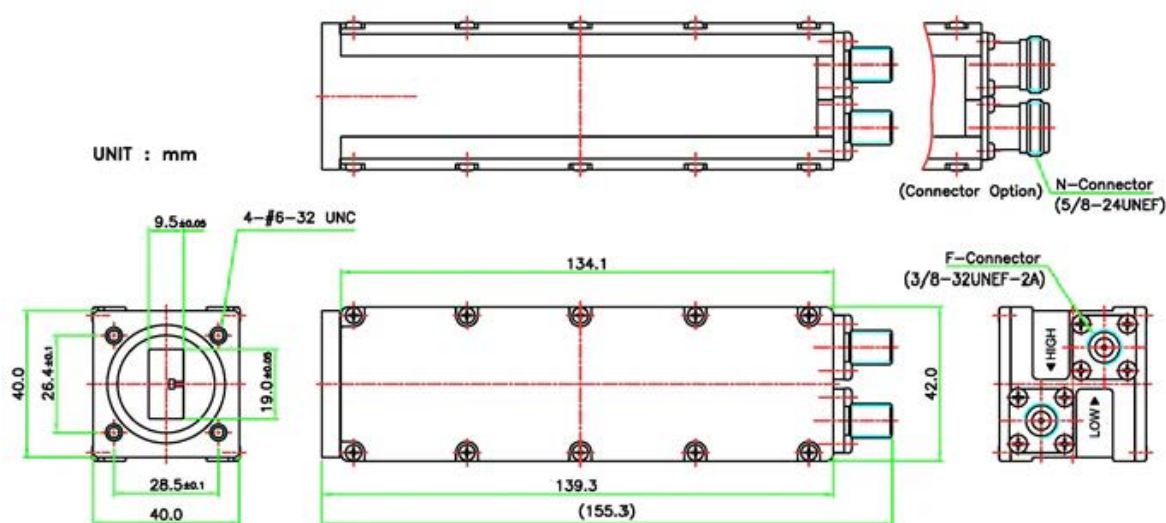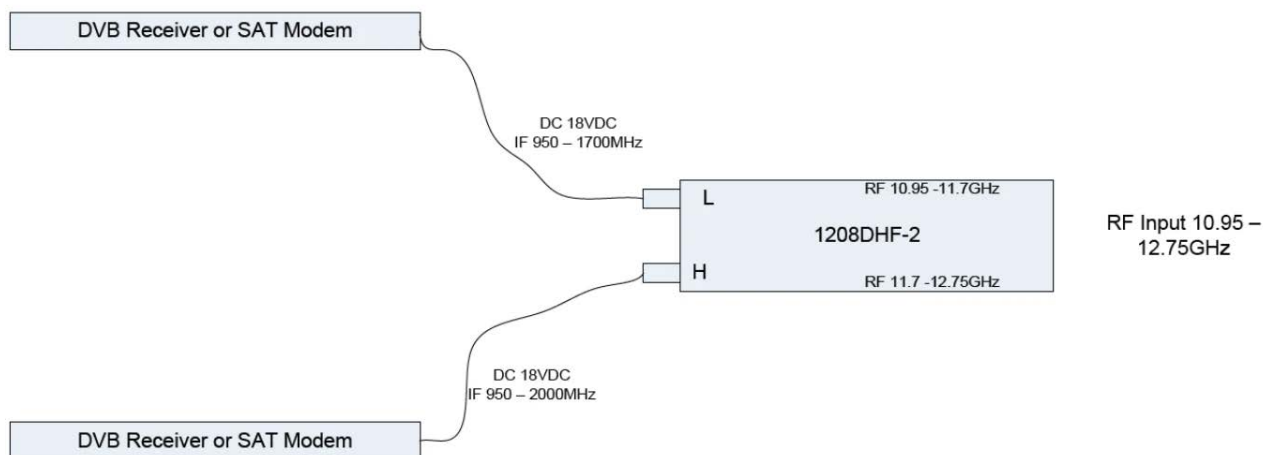

Norsat
International Inc.

ESATCOM
INC

Norsat authorized distributor

Esatcom Inc.
3628 Francis Lewis Blvd.
Flushing, NY 11358
www.esatcom.com
Tel: 718.799.0084
Email: sales@esatcom.com