



## BT-1390

### Bias Tee BT-1300 Series

**DC Connector:** 9: TNC (Female)

**10 MHz Injection:** 0: No Connector



### KEY SPECIFICATIONS

Band	L-Band
Pass Band	950 - 2150 MHz

### RF SPECIFICATIONS

Input VSWR	2.0 : 1 max.
Insertion Loss Max	1 dB
Output VSWR	2.0 : 1 max.

### INTERFACE SPECIFICATIONS

10mhz Injection	No Connector
DC Connector	TNC (Female)
Output Connector	SMA (Female) - 50 Ohm
RF Input Connector	N (Female) - 50 Ohm

### ENVIRONMENTAL SPECIFICATIONS

IP Rating	IP 66
Temperature Operational	-30°C to +50°C
Temperature Storage	-40 to +70°C

### PHYSICAL SPECIFICATIONS


Product Height	25 mm
Product Length	105 mm
Product Weight	0.17 kg
Product Width	55 mm



LOGISTICS SPECIFICATIONS

HS Code	Country of Origin	Ex Works	ECCN Number	Unit Package
8517690000	Made in Canada	Richmond, BC, Canada	EAR99	105 x 55 x 25 mm

HOW TO ORDER

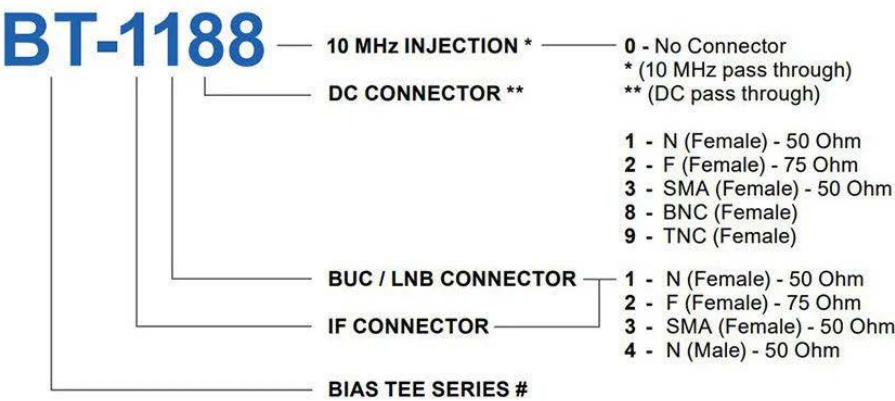


MECHANICAL DIAGRAMS



Norsat  
International Inc.

Innovative Communication Solutions

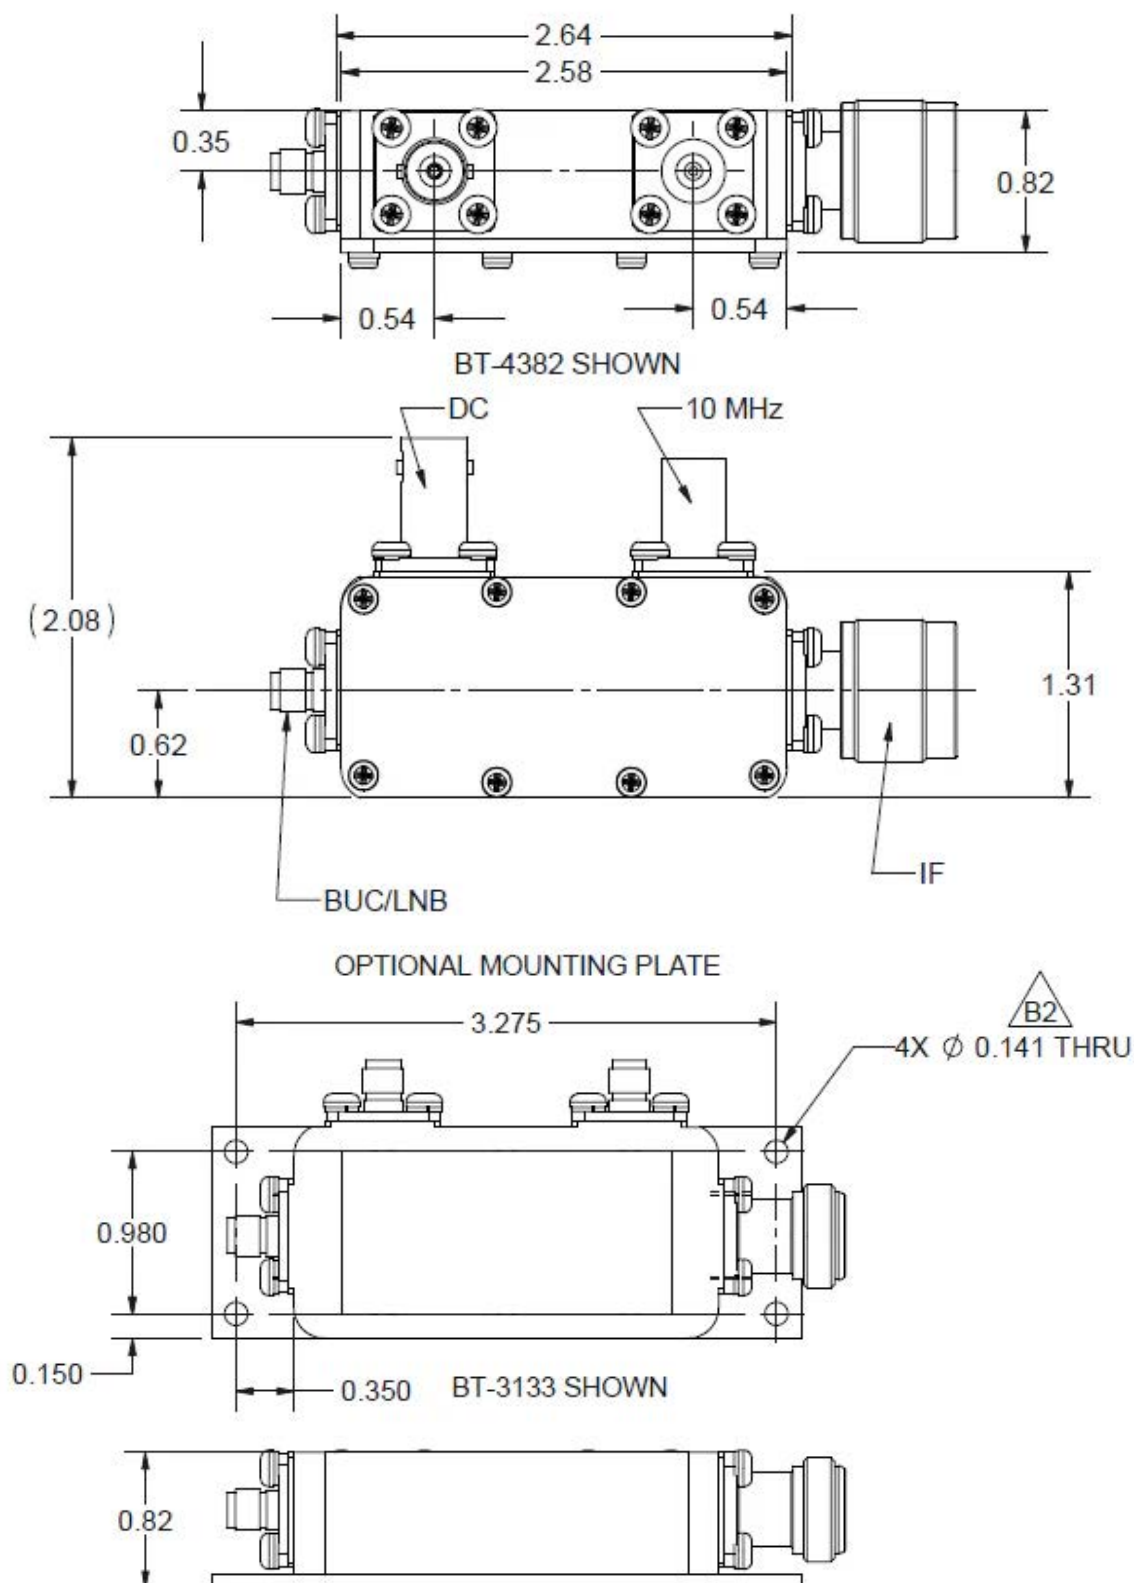

Norsat  
International Inc.

ESATCOM  
INC

Norsat authorized distributor

ESATCOM INC.

3628 Francis Lewis Blvd.

Flushing, NY 11358

[www.esatcom.com](http://www.esatcom.com)

Tel: 718.799.0084

Email: [sales@esatcom.com](mailto:sales@esatcom.com)